

ALPHA

3477PIR100P62

EAN 4031582305340

Swivel castor with total lock, tail end of castor, housing made of pressed steel, bright zinc plated, blue passivated, double ball bearing swivel head, wheel axle with nut, dustguard, plate fitting. Wheel centre made of Polypropylene, Tread: solid rubber, grey non-marking, roller bearing



BETTER MOBILITY. BETTER LIFE.



Picture may differ from original product


Technical Data

Wheel diameter	100 mm
Width of Tread	35 mm
Castor width	75 mm
Size of Plate	105 x 80 mm
Plate hole centres	80/77 x 60 mm
Plate hole	9 mm
Dome-Ø	75 mm
Offset	41 mm
Swivel Interference	246 mm
Overall height	128 mm
Temperature	- 20 / + 60 °C
Standard	EN 12532
Weight	1.016 kg
Swivel Radius	123 mm
Hardness of tread	Shore A 80
Load capacity	75 kg
Load capacity (static)	150 kg


Advantages at a glance

Roll performance	● ● ● ○ ○
Movement noise	● ● ● ○ ○
Attrition	● ● ● ○ ○
Corrosion resistance	● ● ● ○ ○

Dimensions

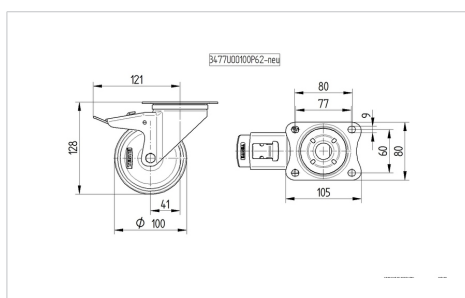

Structure & Mounting

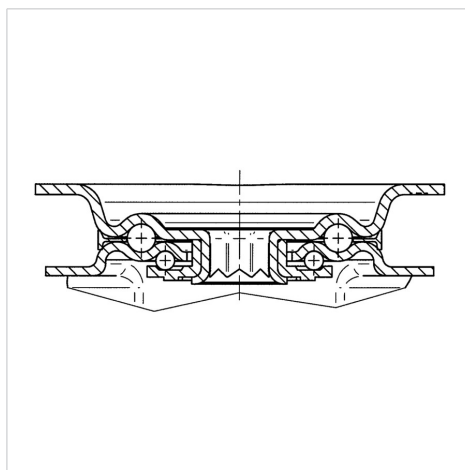

ALPHA

3477PIR100P62

EAN 4031582305340



BETTER MOBILITY. BETTER LIFE.

Structure & Mounting

