

DELTA

3642IEP160P63

EAN 4031582337211

Swivel castor with total lock, head end of castor, housing made of heavy pressed steel, bright zinc plated, blue passivated, precision ball bearing swivel head, sealed, wheel axle with nut, plate fitting. Wheel centre made of Aluminium, Tread: black elastic-tyre, vulcanized, precision ball bearing

TENTE

BETTER MOBILITY. BETTER LIFE.



Picture may differ from original product


Technical Data

| | |
|------------------------|----------------|
| Wheel diameter | 160 mm |
| Width of Tread | 50 mm |
| Castor width | 94 mm |
| Size of Plate | 137 x 105 mm |
| Plate hole centres | 105 x 80/75 mm |
| Plate hole | 11 mm |
| Dome-Ø | 94 mm |
| Offset | 55 mm |
| Swivel Interference | 270 mm |
| Overall height | 210 mm |
| Temperature | - 20 / + 85 °C |
| Standard | EN 12532 |
| Weight | 3.437 kg |
| Swivel Radius | 135 mm |
| Hardness of tread | Shore A 68 |
| Load capacity | 350 kg |
| Load capacity (static) | 700 kg |


Advantages at a glance

| | |
|----------------------|-----------|
| Roll performance | ● ● ● ○ ○ |
| Movement noise | ● ● ● ○ ○ |
| Attrition | ● ● ● ○ ○ |
| Corrosion resistance | ● ● ● ○ ○ |

Dimensions

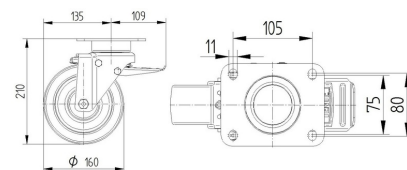

Structure & Mounting

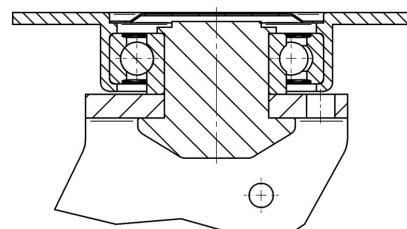

DELTA

3642IEP160P63

EAN 4031582337211



BETTER MOBILITY. BETTER LIFE.

Structure & Mounting

